

**B.E.G.****LUXOMAT®**

## RC-plus next N 130

Prod.No. 93321 EAN: 4007529933211

- Voltage: 110 – 240 V AC 50 / 60 Hz (can also be supplied with other operating voltages ON request)
- Dimensions: 121 x 71 x 85 mm
- Power consumption: approx. 0.5 W

### Areas of application

- outdoor areas (entrances/access roads)
- parking areas
- underground car parks
- high-bay warehouse

### Order data

Designation	Colour	Art.No
RC-plus next N 130	white	93321

### Accessories

Designation	Colour	Art.No
BLE-IR-Adapter	black	93067
IR-RC	-	92000
IR-RC-LD	-	92649
IR-RC-Mini	-	92090
Wire basket BSK (Ø 164 x 143 mm)	white	92467
RC-Arc extinction kit	white	10880
Mini-RC-Arc extinction kit		10882
Outside corner socket RC-plus next	black	97024
Outside corner socket RC-plus next	brown	97014
Outside corner socket RC-plus next	white	97004
Outside corner socket RC-plus next	silver	97043
Inside corner socket RC-plus next	white	97005

## Technical data




Voltage:	110 – 240 V AC 50 / 60 Hz (can also be supplied with other operating voltages ON request)
Dimensions:	121 x 71 x 85 mm
Power consumption:	approx. 0.5 W
Detection area:	horizontal 130° (Wall mounting) max. 20 m across
Range:	max. 6 m towards max. 4 m anti-creep protection
Monitored area (tangential movement):	450 m <sup>2</sup> / 2.5 m mounting height
Mounting height min./max./recommended:	2 m / 5 m / 2.5 m
Degree / class of protection:	IP54 / Class II
Impact strength:	IK03
Ambient temperature:	-25 °C to +50 °C
Housing:	polycarbonate, UV-resistant
Material color:	white mat, similar to RAL9010
<b>Channel 1 (lighting control)</b>	
Switching power:	3000 W, $\cos \varphi = 1$ 1500 VA, $\cos \varphi = 0.5$ 300 W LED max. inrush current $I_p$ (20 ms) = 165 A max. inrush current $I_p$ (200 $\mu$ s) = 800 A
Type of contact (k):	1x $\mu$ -contact, NO contact with tungsten pre-make contact
Follow-up time:	15 sec – 16 min, Pulse
Switch-on threshold:	2 – 500 Lux

## Product information

Motion detector with 130° detection area and anti-creep zone
Mechanical range adjustment
Different follow-up time depending on direction of movement
Uninterrupted parallel circuit detection of several detectors
Manual switching via push-button possible
Adjustable ball head
Immediate operation using factory settings
Additional functions can be set up using the optional remote control.
Zero crossing switching
Socket compatible to RC-plus (next) and Vario
Faulty switching due to animals can be avoided by reducing the sensitivity
Easy mounting thanks to plug base
Wall, ceiling and corner mounting
Factory settings 3 min and 20 lux

### Application examples:

outdoor areas (entrances/access roads), parking areas, underground car parks, high-bay warehouse

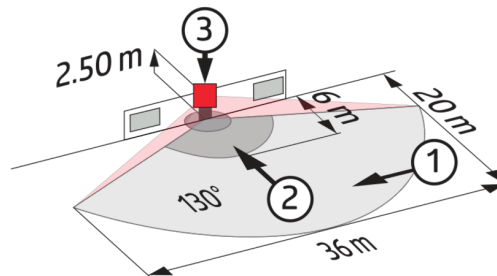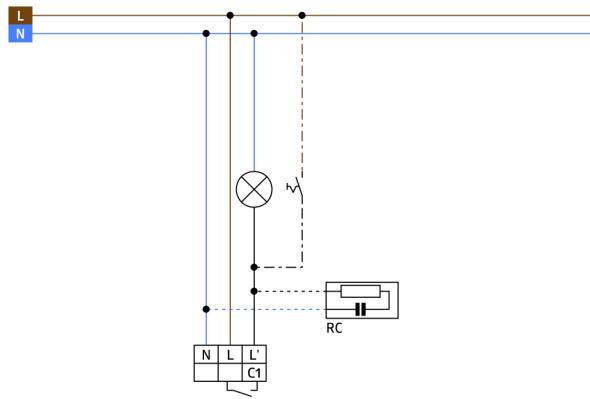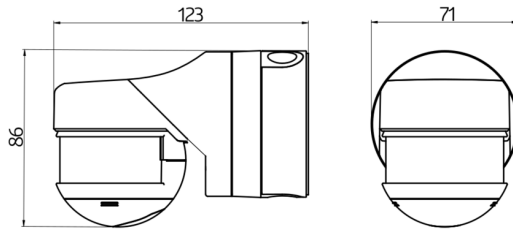

## Accessories



**BLE-IR-Adapter**  
Art.No: 93067

Dimensions: 40 x 55 x 103 mm  
Material color: black  
Frequency: 2.4 GHz ISM band, GFSK 0.2 dBm + 5.3 dBi = 5.5 dBm



**IR-RC**  
Art.No: 92000

Battery: 3.0 V Lithium CR2032 (inclusive)  
Dimensions: 80 x 60 x 8 mm  
Material color: -



**IR-RC-LD**  
Art.No: 92649

Battery: 3 x 1.5 V Micro AAA (not included)  
Dimensions: 83 x 53 x 17 mm  
Material color: -



**IR-RC-Mini**  
Art.No: 92090

Battery: 3.0 V Lithium CR2032 (inclusive)  
Dimensions: 57 x 35 x 7 mm  
Material color: -



**Wire basket BSK (Ø 164 x 143 mm)**  
Art.No: 92467

Dimensions: Ø 164 x 143 mm  
Impact strength: IK09  
Housing: coated steel basket



**RC-Arc extinction kit**  
Art.No: 10880

Voltage: 230 V AC ±10%  
Dimensions: 38 x 12 x 26 mm  
Degree / class of protection: IP20 / Class II



**Mini-RC-Arc extinction kit**  
Art.No: 10882

Voltage: 230 V AC ±10%  
Dimensions: 50 x 23 x 8 mm  
Degree / class of protection: IP20 / Class II




**Outside corner socket RC-plus next**  
Art.No: 97024

Dimensions: Ø 71 x 34 mm  
Degree / class of protection: IP54  
Housing: polycarbonate, UV-resistant



**Outside corner socket RC-plus next**  
Art.No: 97014

Dimensions: Ø 71 x 34 mm  
Degree / class of protection: IP54  
Housing: polycarbonate, UV-resistant



**Outside corner socket RC-plus next**  
Art.No: 97004

Dimensions: Ø 71 x 34 mm  
Degree / class of protection: IP54  
Housing: polycarbonate, UV-resistant



**Outside corner socket RC-plus next**  
Art.No: 97043

Dimensions: Ø 71 x 34 mm  
Degree / class of protection: IP54  
Housing: polycarbonate, UV-resistant



**Inside corner socket RC-plus next**  
Art.No: 97005

Dimensions: 60 x 61 x 68 mm  
Degree / class of protection: IP54  
Housing: Housing UV- and shockresistant